




SAUDI PIPE SYSTEMS CO.

DISMANTLING JOINT

Body Made of Ductile Iron GGG50
 Coated by FBE Coat Min THK 300 Microns
 Blue Color Hot Dip Galvanized Steel Bolts And Nuts Grade 4.8

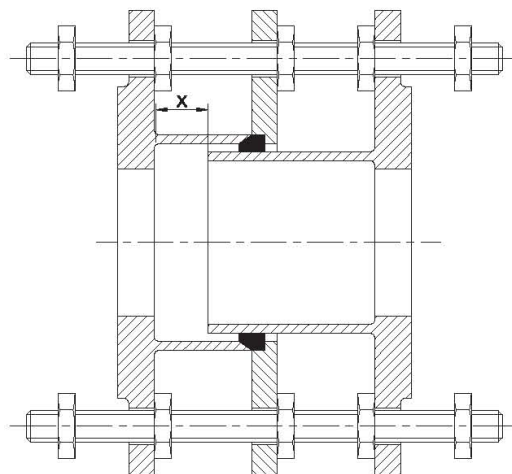

Specifications :

Manufactured according to DIN 2633

Made of Ductile Iron GGG 50 to DIN EN 1563

Spigot and socket lock type joints are designed for installing and/or removal fitting.

they permit variation in length (X).

Gasket of non-aging perbunan.

Anchor studs and nuts are electro galvanized.

Coating inside and outside with phenol-free bitumen.

Design Mechanical Data, Dimension , Materials and weight are subject to change without notice



SAUDI PIPE SYSTEMS CO.

DISMANTLING JOINT

Dimensions :

DN	PN 10			VARIATION	PN 16		
	WEIGHT	OVERALL LENGTH	LENGTH OF ANCHORS	X (mm)	WEIGHT	OVERALL LENGTH	LENGTH OF ANCHORS
	Kg	mm	mm		Kg	mm	mm
40	LOOK AT PN 16			25	9.5	180	280
50				25	11	180	280
65				25	13	180	280
80				25	17	200	310
100				25	21	200	310
125				25	26	200	310
150				25	35	200	320
200	49	220	340	25	53	220	340
250	65	220	360	25	78	230	370
300	73	220	360	25	94	250	410
350	97	230	360	25	130	260	410
400	125	230	370	25	162	270	430
450	140	250	390	25	190	270	430
500	162	260	390	25	240	280	440
600	205	260	410	25	335	300	480
700	260	260	410	25	370	300	480
800	355	290	460	25	480	320	520
900	408	290	460	25	550	320	520
1000	450	290	480	25	720	340	560
1100	585	300	480	25	820	340	560
1200	750	320	520	25	1110	360	600
1300	912	340	530	25	1230	370	610
1400	1035	360	560	25	1360	380	630
1500	1162	380	590	25			
1600	1520	390	600	25			
1800	1830	400	630	25			
2000	2280	410	640	25			
2200	2790	430	700	25			
2400	3510	440	710	25			

Design Mechanical Data, Dimension , Materials and weight are subject to change without notice